

CalDigit Thunderbolt™ 3






miniDock

Return of the Ports

**Authentic
Thunderbolt 3 Dock**

Delivering the full
40Gb/s Bandwidth

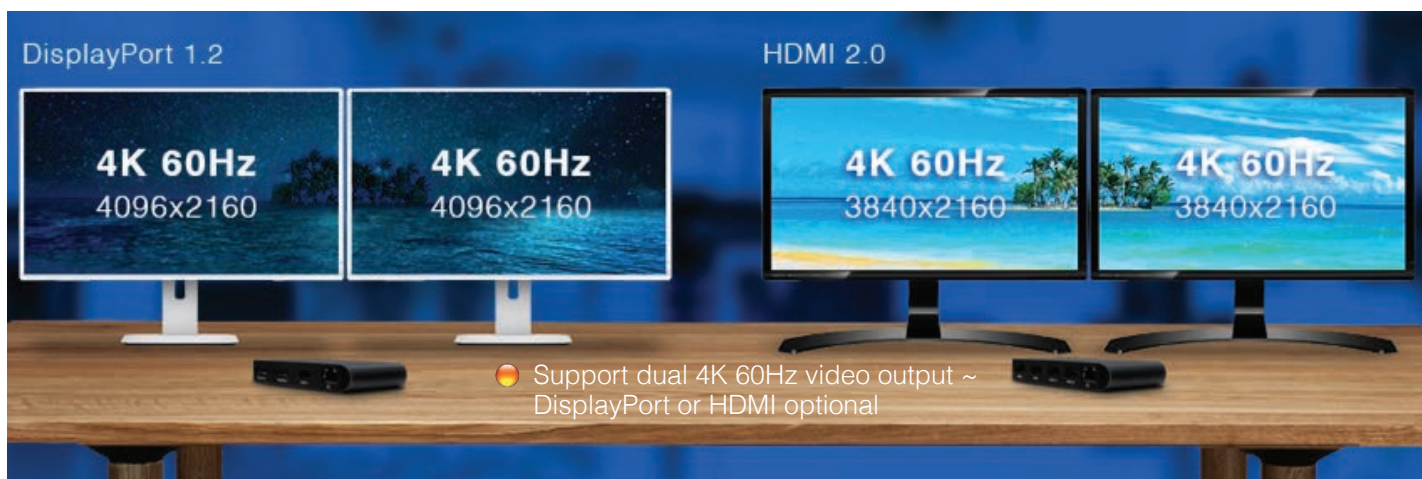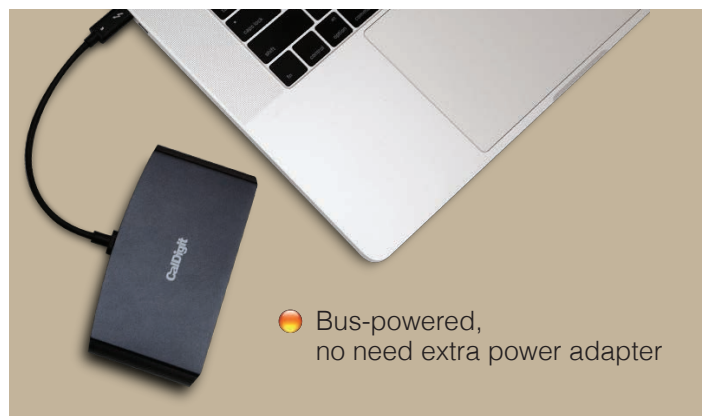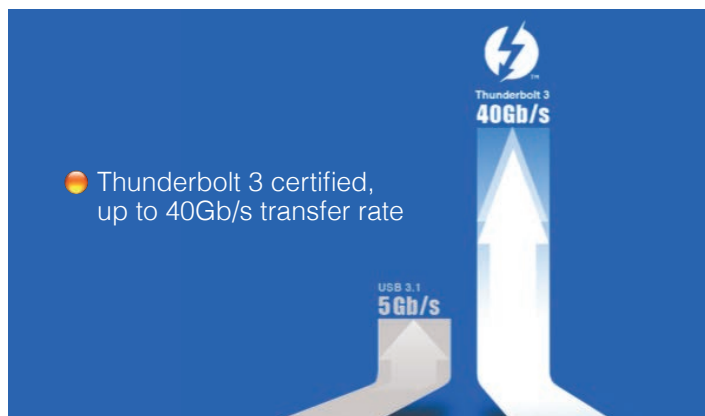



- Compliant to the power budget of 15W of down-streaming Thunderbolt port, assure all I/O ports working normally under sufficient power consumption
- Thermal dissipation verified
- Aluminum housing, compact & stylish
- Plug & Play, no driver needed
- Highly portability
- Mac & Windows compatible

► The Difference between CalDigit mini Dock & general USB-C Hub on the market :

1. Thunderbolt 3 specification, up to 40Gb/s throughput, highly elevate performance of workflows
2. Thunderbolt 3 certified, it has passed strict validation tests
3. Fully compliant to Thunderbolt 3 Type-C power budget design, free of power insufficiency & thermal issues
4. Assure dual 4K 60Hz displays, no worry about green display or no video output issues
5. Aluminum housing, compact design with high efficiency on heat dissipation
6. High CP value product



Specification	DisplayPort	HDMI
Thunderbolt 3 port	1x ; 40Gb/s transfer rate	1x ; 40Gb/s transfer rate
Display	2x DisplayPort 1.2, 4K (4096x2160)@60Hz	2x HDMI 2.0, 4K (3840x2160)@60Hz
USB	1x USB3.0 Type-A	1x USB3.0 Type-A; 1x USB2.0 Type-A
Gigabit Ethernet	1x	1x
Bus powered	Yes	Yes
Operating System	mac OS X & Windows 10	mac OS X & Windows 10
Operating temperature	0°C ~ 70°C (32°F ~ 158°F)	0°C ~ 70°C (32°F ~ 158°F)
Storage temperature	-40°C ~ 49°C (-40°F ~ 120°F)	-40°C ~ 49°C (-40°F ~ 120°F)
Environmental humidity	0% to 95% non-condensing	0% to 95% non-condensing
Enclosure material	Aluminum	Aluminum
LED indicator	RJ45	RJ45
Dimension	4.88x2.56x0.74 inch (124x65x18.8 mm)	4.88x2.56x0.74 inch (124x65x18.8 mm)
Weight	140g	140g

