



## TS3 Plus<sup>+</sup>

Thunderbolt™ Station 3 Plus




### 15 PORTS OF EXTREME CONNECTIVITY

The Thunderbolt™ Station 3 Plus offers ultimate connectivity by adding 15 ports for any applications. The options go beyond the conventional, helping Thunderbolt 3 users not only expand their connectivity but also charge their laptops. The power of Thunderbolt™ 3 combined with CalDigit's outstanding docking solution has resulted in the most powerful Thunderbolt™ 3 dock on the market.

### HIGHLIGHTS

- Thunderbolt™ 3 technology, 40Gb/s transfer rate, 8 times speed of USB3.0
- NEW and improved! Industry leading 87W host charging for Mac or Windows Laptops
- 15x I/O ports extreme connectivity of workflow
- 7x USB ports, the only dock with USB3.1 Gen2 Type-C port on the market
- Dual 4K 60Hz or single 5K video output
- Standalone charging function, charge mobile phone, tablet pc, camera without connecting PC
- SD4.0 UHS-II card reader, support SD, SDHC, or SDXC card, transfer rate up to 312MB/s
- S/PDIF digital optical audio output, upgrade to environmental stereo by connecting amplifier
- The only dock to support one-click eject and Apple SuperDrive
- Expand up to 6 external devices by Thunderbolt™ 3 daisy chaining technology
- Slim and stylish appearance industrial design
- Unique aluminum heat sink helps heat dissipation efficiently
- Vertical or horizontal placement
- Includes Certified Thunderbolt 3 cable with 40Gb/s bandwidth & up to 100W Power Delivery

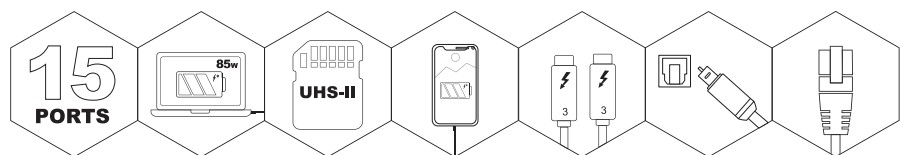

### 5K OR DUAL 4K DISPLAY

The TS3 Plus' extreme connectivity is not limited to just data. Users have the option to connect dual extended 4K 60Hz monitors or a single 5K 60Hz monitor.

### WHAT CAN YOU DO WITH 40GB/S?

- 16 million more pixels for two 4K displays
- Transfer a 4K movie in less than 30 seconds
- Transfer 3hrs of 4K GoPro Studio footage in less than 1 minute



## TECHNICAL SPECIFICATIONS

### Interface

- 2 x Thunderbolt™ 3
- 1 x DisplayPort 1.2
- 5 x USB-A 3.1 Gen 1 (5Gb/s, 1.5A, 7.5W)
- 2 x USB-C
  - 1 x USB-C 3.1 Gen 2 (10Gb/s, 1.5A, 7.5W) Rear
  - 1 x USB-C 3.1 Gen 1 ( 5Gb/s, 1.5A, 7.5W) Front
- 1 x SD Card Reader (SD 4.0 UHS-II)
- 1 x Digital Optical Audio (S/PDIF)
- 1 x Gigabit Ethernet
- 1 x Analog Audio In (Stereo)
- 1 x Analog Audio Out (Stereo)

### System Requirements


- Thunderbolt™ 3 Computers
- MacOS 10.12 or later
- Windows 10 or later

### Dimensions and Weight

- Height: 5.15 in (131 mm)
- Width: 1.57 in (40.0 mm)
- Depth: 3.87 in (98.4 mm)
- Weight: 1.04 lbs (0.47 kgs)

### In the Box

- 1 x CalDigit TS3 Plus
- 1 x Power Adapter (180W)
- 1 x Power Cord
- 1 x Thunderbolt 3 Cable (Certified 40Gb/s, up to 100W)

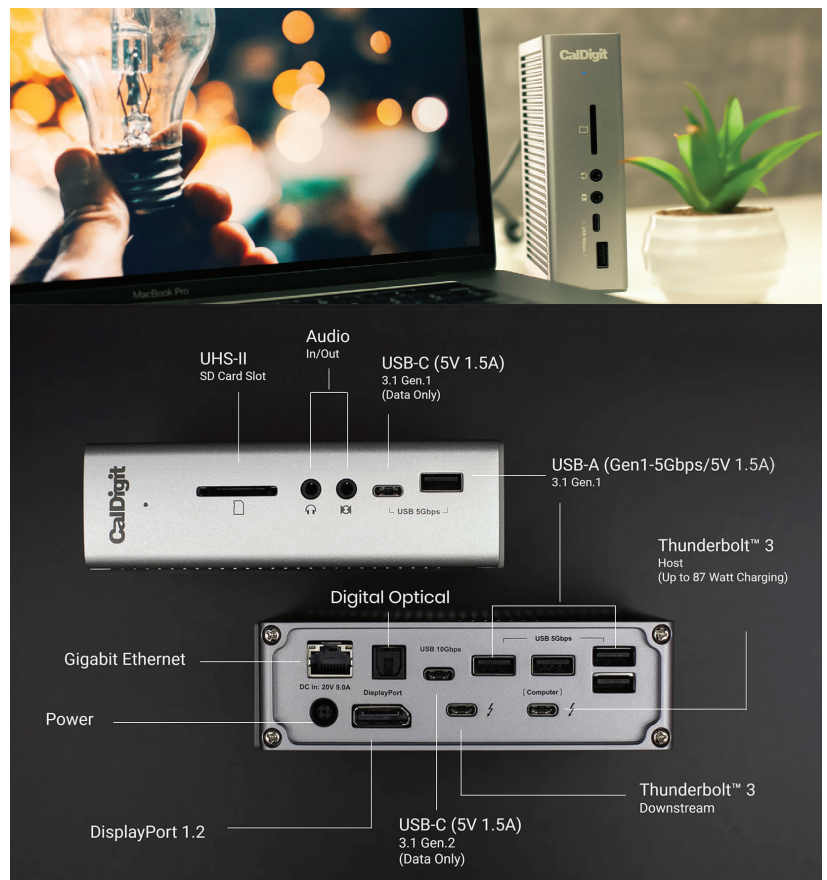

\*The TS3 Plus provides up to 87W charging for Mac & Windows Thunderbolt 3 laptops. Firmware update is required. For more information, please visit our KB article. The charging feature may vary depending on the design of your Windows Thunderbolt 3 laptop. Check with the system manufacturer for more information.

#### United States

CalDigit Inc  
1941 E. Miraloma Ave. Ste. B  
Placentia, CA 92870-6770  
United States

Sales@CalDigit.com  
+1 (714) 572-9889

#### UK & Europe

CalDigit UK LTD  
Unit 3 Glenmore Business Centre,  
Witney, OXON, OX29  
0AA, United Kingdom

EUSales@CalDigit.com  
+44 (0) 1993-700-972

#### Japan

Ayala Design Co., Ltd.  
Sato Bld. 301,  
1-21 Matsubara-cho, Kagoshima-Shi,  
Kagoshima, 892-0833 Japan

Japan@CalDigit.com  
+81 (50) 3136-5168

#### Asia

Castle Rock Inc.  
3F, No.880, ZhengZhong Road  
Zhonghe Dist., New Taipei City 23586,  
Taiwan, R.O.C

Asia@CalDigit.com  
+886 (2) 2226-0966